

AC/DC Hour Meter Mini

Panel Mount
Series N330

Model Code N330 0300 1001 0000



IMD Europe GmbH · Auf dem Molzberg 2 · D-57548 Kirchen

Quality Features



Absolut dust-, fresh-, & saltwater resistant till 20m underwatersurface.



Due to a self-contained battery it has a life cycle of 12 years.



Extrem shock proof up to at least 45G.



High contrast LCD display is always lit and is polarized to prevent discoloration from UV exposure.



Pressure washer cleaning possible.



No polarity = easy to install

Product Pictures



Top View



Perspective View



Cutout Diameter

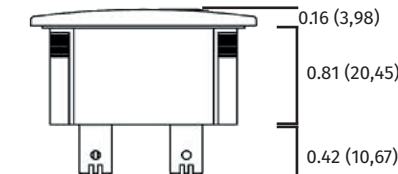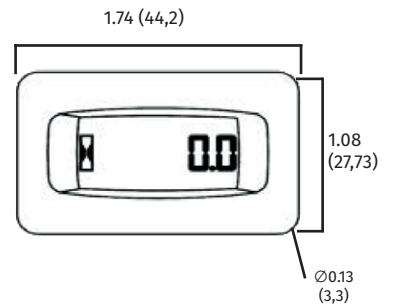

imperial (metric)

OEM and Packaging

Bubble Wrap Bag

- Hour Meter



Apply for

For any device with key-switch start and electrical hookup.

5- 277 VDC or AC 50/60 Hz

For three-phase-devices where the plus terminal has to be linked to one face and the minus terminal has to be linked to neutral.

For Diesel engine electric motor (with ON / OFF switch) Petrol engine with key start.



Integrated Functions

for N330 0300 1001 0000
Hours only


No Timer
No Service Alerts



Packard hookup:
- Input 5-100 VDC
- non-polarized
- Input impedance: 2m

Installation Instruction

Accessory

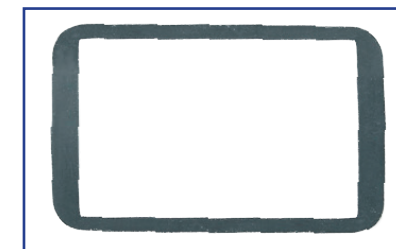

Gasket
Although our products are certified water resistant there are other non-waterproof products integrated in the equipment. GDI-Gaskets are the perfect solution for protecting other gadgets from getting wet.